



BW26S SERIES CRYSTAL - 2.1 x 6.2mm - SMD FORMED LEADS

Frequency Range	32.768kHz
Load Capacitance (CL)	Standard (12.5pF, 6pF) User Spec
Frequency Tolerance (25 °C)	±20 ppm Standard, User Spec
Frequency Stability	-0.034ppm/ 25°C ² ±0.006ppm
Motional Resistance (ESR)	40kΩ max
Shunt Capacitance (CO)	1.45pF typical
Motional Capacitance (C1)	0.0028pF typical
Drive Level (DL)	1.0μW max
Quality Factor (Q)	60,000 typical
Operating/ Storage Temperature Range	-40 °C to +85°C
Aging	±5 ppm per year max
Insulation Resistance	500MΩ min at 100Vdc ± 15V

PART NUMBERING GUIDE



Series	Tolerance	Load	Freq
BW26S	±5ppm = A	06 = 6pF	32K768
	±10ppm = B	12.5 = 12.5pF	
	±15ppm = C	XX = User Spec	
	±20ppm = D		

For other Tolerance, Stability, and Temperature options please consult factory

Example P/N: BW26S – A – 12.5 – 32K768

To Request a Quote click here - www.beckelec.com//request-a-quote/

MECHANICAL DRAWING

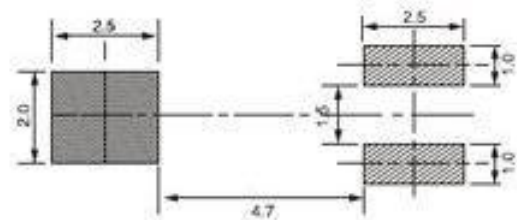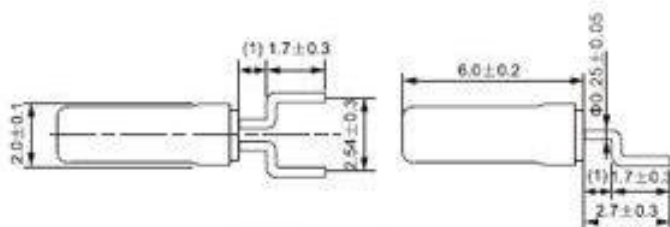

The body of the product should be not soldered to the PCB.

6718 N. 59th Avenue, Glendale, AZ 85301 ▪ Phone: 623-435-6555

Website: www.beckelec.com ▪ Email: sales@beckelec.com