



BX752 SERIES CRYSTAL - 7.0 x 5.0 x 1.4mm – 2 PAD

Frequency Range	5.500MHz to 150.000MHz
Overtone	Fundamental , 3OT
Motional Resistance (ESR)	See Table Below
Load Capacitance (CL)	Standard (9pF,10pF,12pF) User Spec
Shunt Capacitance	7pF max
Drive Level (DL)	10μW(Standard), 500μW max
Frequency Tolerance (25 °C)	±10 ppm to ±25 ppm
Frequency Stability	±10 ppm to ±50 ppm (See Table Below)
Operating Temperature Range	-20 °C to +70°C or -40 °C to +85°C
Storage Temperature Range	-40 °C to +85°C
Aging	±3 ppm per year max

MOTIONAL RESISTANCE (ESR)

Frequency (MHz)	5.5 < 10	10.1 < 20	20.1 < 41	38.0 < 50	50.1 < 85	85.1 < 150
CI (Ω)	80	50	40	80	50	40
Overtone	Fundamental			3 rd Overtone		

PART NUMBERING GUIDE


Series	Tolerance	Temperature Range/Stability	Load	Freq
BX752	±10ppm = 1	-20 °C to +70°C/ ±15ppm = A	06 = 6pF	30M000
	±15ppm = 2	-20 °C to +70°C/ ±20ppm = B	09 = 9pF	
	±20ppm = 3	-20 °C to +70°C/ ±25ppm = C	10 = 10pF	
	±25ppm = 4	-20 °C to +70°C/ ±30ppm = D	12 = 12pF	
		-20 °C to +70°C/ ±50ppm = E	XX = Choice pF	
		-40 °C to +85°C/ ±15ppm = F		
		-40 °C to +85°C/ ±20ppm = G		
		-40 °C to +85°C/ ±25ppm = H		
	-40 °C to +85°C/ ±30ppm = J			
	-40 °C to +85°C/ ±50ppm = K			

For other Tolerance, Stability, and Temperature options please consult factory

Example P/N: BX752 – 1 – B – 10 – 30M000

To Request a Quote click here - www.beckelec.com//request-a-quote/

MECHANICAL DRAWING

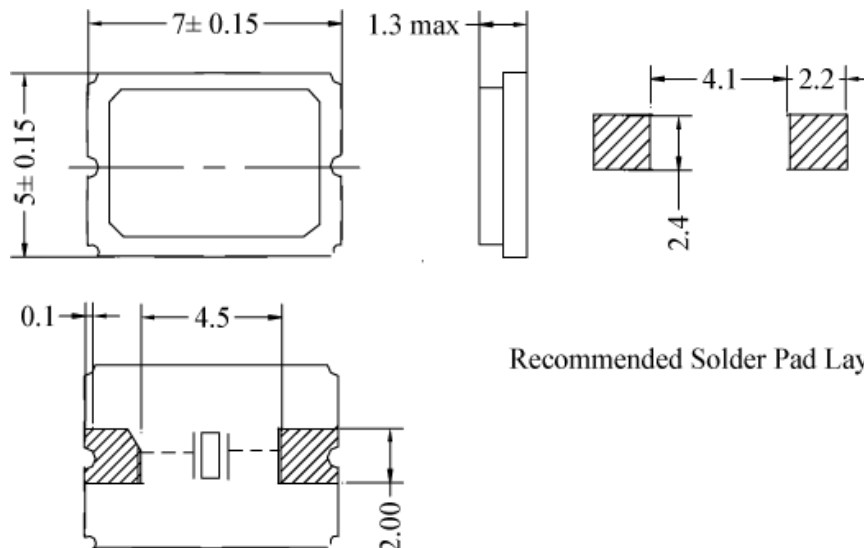

Recommended Solder Pad Layout